
PUBLIC ADDRESS, WALL CONTROLLERS

AioCTLw

Part no. H11857 EAN 3662009029306

Wall-mounted controller for AIO matrices.

Wall-mounted controller for AIO matrixes, for intuitive control of volume and sources in one or more zones. Illuminated display, rotary knob with click. PoE power supply, simple installation with a single network cable. Compact (87x87x43mm), compatible with standard flush-mounting boxes. Matt white finish, also available in black.

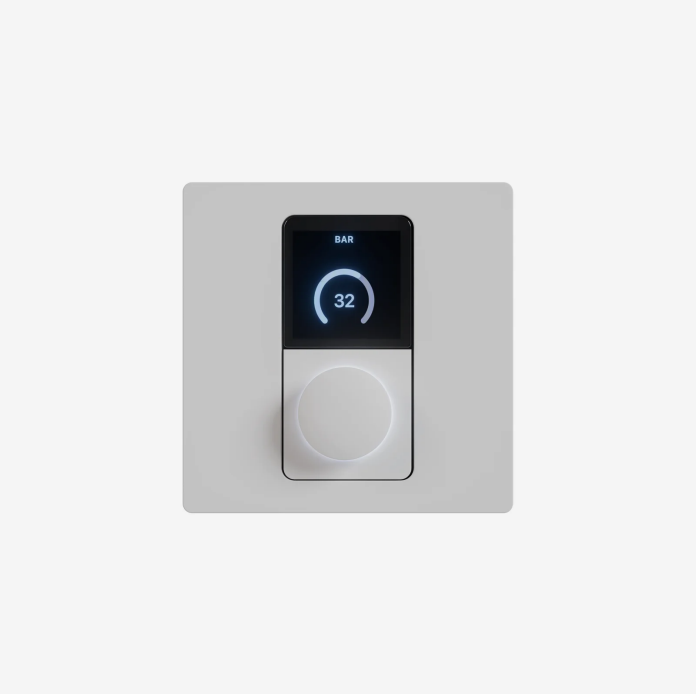

PRODUCT PAGE ONLINE

audiophony-pa.com/aio/aioctl.html

Manuals, compatible accessories and updates — scan the code or click the address.

User manual (PDF)

Technical specifications

Compatibility	**AIO matrices (Aio4125, Aio8125, Aio4500)**
Controls	**Volume by zone, source selection, mute**
Zones	**1 or more zones from a single AIO amplifier**
Interface	**Backlit display, rotary knob with click**
Power Supply	**PoE (Power over Ethernet)**
Dimensions	**87 x 87 x 43 mm**
Weight	**120 g**
Installation	**Compatible with standard flush-mount boxes**
Finish	**Matte white**
Alternative version	**Available in matte black (AioCTLb)**

Overview

Wall-mounted controller for AIO matrices.

Give your users elegant control over their audio environment with the AioCTLw, the wall-mounted controller designed to intuitively control one or more zones of your AIO matrix. With a compact design (87x87x43mm) compatible with standard flush-mount boxes, this controller blends discreetly into any environment: bars, restaurants, hotels, performance venues, and retail spaces. Its backlit display and click-stop rotary knob provide a seamless user experience that’s accessible to everyone, with no training required. Elegant matte white finish. Also available in black.

Simplicity and ease of use.

The AioCTLw offers three essential functions: zone-specific volume control, audio source selection, and instant mute. The streamlined interface is intuitive: no complex menus, no risk of accidentally changing the system settings. End users can control their environment in just a few seconds, while the installer retains full control via the AIO matrix’s web interface. Configurable access restrictions protect the system from accidental misuse.

Ultra-simple installation.

Powered by PoE (Power over Ethernet), the AioCTLw can be installed with a single network cable, eliminating the need for a separate power supply and drastically simplifying cabling. Compatible with standard flush-mount boxes (87x87mm), it installs as easily as a conventional light switch. A single controller can manage one or more zones using a single AIO amplifier, offering total flexibility in designing your multi-zone system.

Compatible accessories



Aio4500

H11856



Aio4125

H11854



Aio8125

H11855



Aio4125

H11854

Photo



Photo

