

PUBLIC ADDRESS, WALL CONTROLLERS




AmiD2b

Part no. H11893 EAN 3662009029665

Bluetooth and RCA, directly into your Dante network.

- › Dante Wall-Mounted Interface with Bluetooth
- 5.0 and Stereo RCA Input for Ami Series Matrix
- Switches — PoE — Black

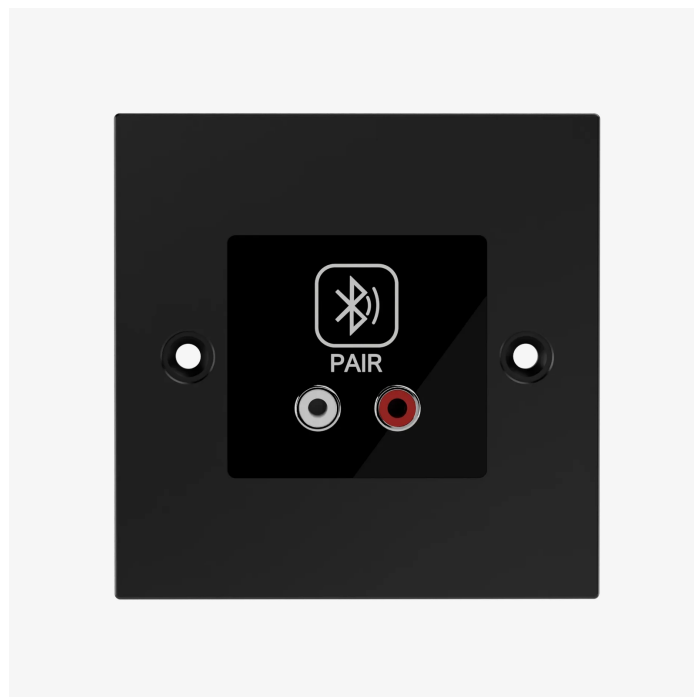

PRODUCT PAGE ONLINE

audiophony-pa.com/ami/amid2.html

Manuals, compatible accessories and updates — scan the code or click the address.

[User manual \(PDF\)](#)

Technical specifications

	Bluetooth 5.0 — takes priority over the RCA input
	Alternative stereo RCA input
	Dante 2-channel conversion — 48 kHz / 24-bit
Dante/AES67 Latency	< 2 ms
	Touch button for pairing + visual feedback for connection and signal
	Configuration via the Ami BT Control software
	Compatible with the Dante versions of the entire Ami lineup
Bluetooth	5.0 — 2.4 GHz — 2.5 mW
Bluetooth channels	2
Maximum input level	12 dBu
THD	0.005% @ 1 kHz + 4 dBu
Signal-to-noise ratio	> 100 dB
Power	PoE, 48 V max. — PoE switch required
Power consumption	< 5 W
Dimensions	86 × 86 × 40 mm
Weight	170 g

Overview

Bluetooth and RCA, directly into your Dante network.

The AmiD2 converts Bluetooth 5.0 or stereo RCA signals into a Dante audio stream, feeding it directly into the system's network from any point in the rack. Designed for in-wall installation and powered via PoE through a single network cable, it is configured using the Ami BT Control software. The Bluetooth signal takes priority over the RCA input.

Pairing, security, and compatibility.

The touch button on the front panel handles Bluetooth pairing and displays the connection status and incoming signal strength in real time. The Bluetooth name and password can be changed remotely via Ami BT Control for secure access management. Compatible with the Dante versions of all mixers in the Ami line. PoE switch required.

Compatible accessories



Ami04D
H11873



Ami08D
H11875



Ami16D
H11877



PoE10-250
H11913

Photo

