



BT-AKKULITE IP

Battery powered outdoor LED floodlight, built around 6 RGB, white and amber LED elements. The perfect solution for outdoor applications: receptions, events, lighting of trees, plants, paths... accu light

Référence: B05135

479,00 € inc. VAT




- Battery powered outdoor LED floodlight, built around 6 RGB LED elements, white and amber, to avoid color shadows.
- Beam angle = 22
- The projection angle can be set to 25° (from vertical to horizontal)
- The perfect solution for outdoor applications: receptions, events, lighting of trees, plants, paths...
- Autonomy of +/-10 hours in fade mode with a fully charged battery!
- Each projector is equipped with a wireless transceiver module that is 100% compatible with the W-DMX G4 protocol developed by Wireless Solution Sweden.
- The projector can still be used with the battery empty: just plug it into the mains!
- The RGB color change, white and amber, is very smooth thanks to the high frequency electronics of the dimmer.
- The internal battery charger recharges the battery while the projector is running on AC power.
- Different modes of operation:
 - Autonomous: personalized colors at your choice or automatic, and color change synchronized on the rhythm.
 - o Master/slave mode: light shows synchronized to music, beautifully pre-programmed.
 - o DMX controlled: wired and wireless. (5 modes: 4, 5, 9 or 10 channels, Ledcon-02 Mk2)
 - o Controlled by a small LEDCON-02 Mk2 controller or a LEDCON-XL controller from JB Systems.
 - o Controlled by a wireless IR remote control
- Waterproof power input (Neutrik PowerCon® compatible).
- Sealed 3-pin XLR input and output connectors.
- NOTE: This product has an IP65 rating when used for non-permanent outdoor installation and under normal conditions (not exposed to sea water).

Caractéristiques

Brand	Briteq
Controllable colours	Amber, RGBW
Protection class	IP65
Function	Battery
Protocole	DMX, Wireless DMX



Références compatibles

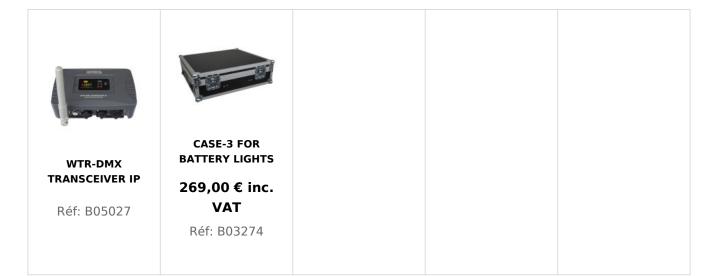

Galerie photos









RED (627nm) 1950	488	217	122	78	55
GREEN (522nm) 2750	688	306	172	110	77
BLUE(458nm) 495	124	55	31	20	14
WHITE (6500K) 2600	650	289	163	104	72
AMBER (1740K) 1300	325	145	81	52	36
LUX (full on) 8160	2040	907	510	326	227
BT-AKKULITE IP					
BEAM: 22°					
1	2	3	4	5	6
BEAM Ø (cm) 0.39	0.78	1.17	1.56	1.94	2.33