

ARCHITECTURAL SPOTLIGHTS



BT-COLORAY 18FCR (XLR 5pin)

Part no. B05565 EAN 5420025655651

18 x 8 W RGBW LED IP65 floodlight with 20° beam angle. Fan cooled



PRODUCT PAGE ONLINE

briteq-lighting.com/bt-coloray-18fcr-xlr-5pin

Manuals, compatible accessories and updates — scan the code or click the address.

Technical specifications

- Three DMX modes for flexible control : 4, 6 and 7 channels
- Includes RDM functionality to simplify remote configuration, including DMX addressing and channel mode selection
- Intuitive LCD display for easy navigation through various configuration menus
- Specially designed for television studios thanks to flicker-free LEDs with a high refresh rate of 1200 Hz
- Offers lighting behavior options, allowing you to simulate a slow-response halogen lamp or a fast-response diode
- Provides four types of dimming curves for customized lighting: linear, square, inverted square and S-curve
- In the event of DMX signal loss, features "all off" or "hold" modes to ensure lighting continuity
- Includes a lock function to prevent unwanted changes to settings
- Allows precise adjustment of white balance to harmonize several projectors together
- Able to store and load factory default settings as well as custom configurations
- Equipped with 5-pin DMX inputs/outputs and Neutrik TRUE1 powerCON inputs/outputs for easy series connection
- Offers an optional modification kit to convert 5-pin XLR IP to 3-pin XLR IP as required
- Note : This product displays an IP65 degree of protection when used in non-permanent outdoor installation and under normal conditions (not exposed to seawater).


Overview

LED spotlight IP 65 RGBW 18 x 8 W

20° beam

IP65-rated, designed to withstand outdoor environments

Dimensions

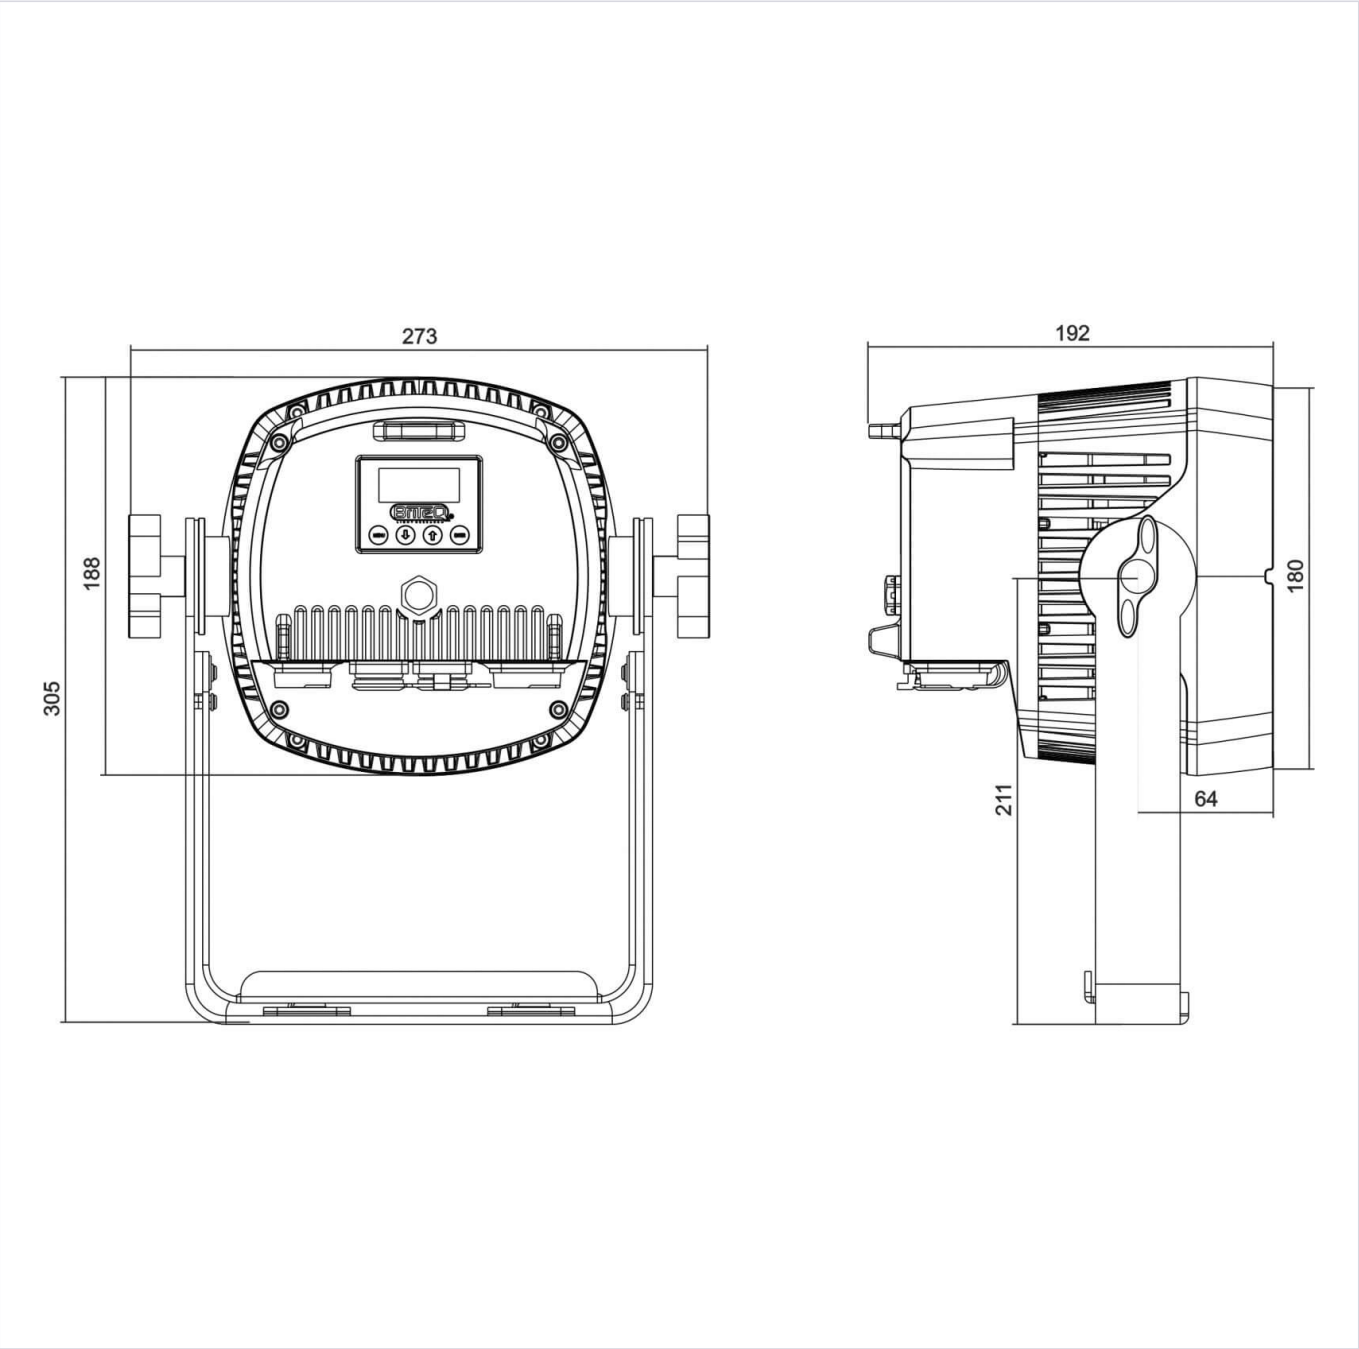

Compatible accessories



**OMEGA BRACKET
SMALL**
B02677



PROJECTOR CASE 3
B03280



BT-XLR5TO3 KIT
B05517

Photo



Photo



Photo



Photo



Photo



Photo



Photo



Photo



Photo



Photo



Photo



Photo

