

DIMMER & SWITCH PACKS



BT-626/FRA

Part no. B04634 EAN 5420025646345

- › Professional 6 channel dimmer/switch pack for 19" rack mounting



PRODUCT PAGE ONLINE

briteq-lighting.com/fr/bt-626-fra

Manuals, compatible accessories and updates — scan the code or click the address.

Overview

Professional 6 channel dimmer/switch pack for 19" rack mounting

Maximum load 16A (3680W) per channel with 16A automatic circuit breakers

Suitable for both inductive and resistive loads

Can be used to dim incandescent lamps, halogen lamps, low-voltage halogen lamps with power regulation and LED lamps that can be dimmed (load must be > 100W).

Outlets equipped with French plugs (see barcode label)

DMX (XLR 3p-+ RJ11) and analog 0/10V (DB9) inputs

Individual block or channel addressing (soft connection)

The dimmer/switch mode can be set individually for all channels

0-100% fader control for all channels (no external controller required)

Preheat control to extend lamp life: 0-6%.

Automatic phase/frequency tracking (45Hz to 63Hz) to improve dimming in difficult conditions.

LED display to monitor all functions, including internal temperature.

Mains voltage (200 ~ 240Vac):

3 phases/4 wires: Max. total load = 22kW

One phase/2 wires: Max. total load = 9.6kW

Intelligent thermal protection with automatic fan control.


Dimensions: 483x88x312mm (19"/2U)

Weight : 8kg

Photo



Photo

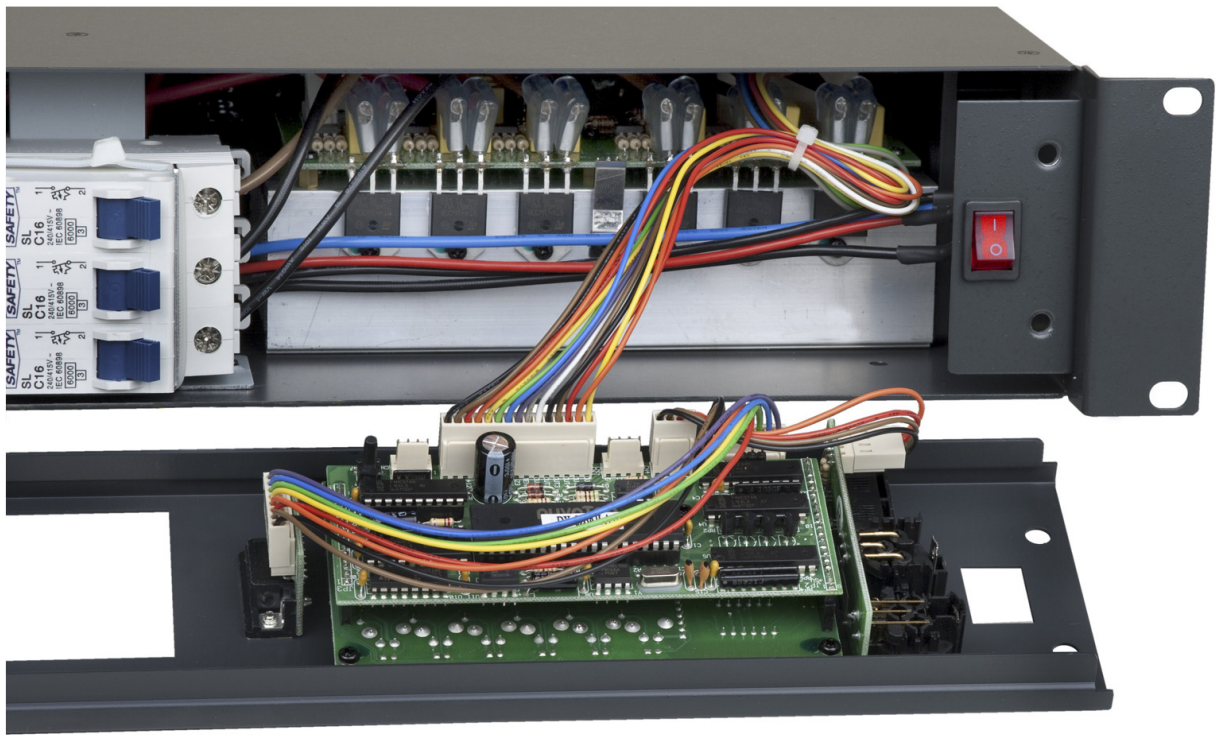

Photo



Photo

