



## BT-THEATRE 400TW

990,00 € inc. VAT

400W LED theatre/TV spotlight with adjustable white from 2800K to 6000K



SKU: B06045

Categories: [Scenography projectors](#)

EAN13 : 5420025660457

brand Briteq

- Powerful 400W Fresnel LED theater light with adjustable CCT.
- Double LED (200W 2800K + 200W 6000K) for adjustable white with CCT from 2800K to 6000K!
- The ideal multi-purpose projector for TV work, theater, rental, exhibition stands!
- Outstanding photometric/price performance: CRI/Ra > 96, TLCI > 98, CQS > 96, Rf > 94, Rg > 100 (@3000 K).
- Motorized beam angle adjustment, controlled by DMX: 11° ~ 56° (field angle: 20° ~ 67°).
- Manual CCT presets for stand-alone use: 2800 K, 3000 K, 3200 K, 4000 K, 4300 K, 5600 K, 6000 K.
- Filter holder for the use of color filters and eight-leaf barn door included.
- No need for heavy and expensive dimmers!
- Very quiet operation: temperature controlled, low noise cooling fan.
- LCD display for easy navigation in the configuration menu!
- Manual or DMX control: 6 different channel modes (8bit & 16bit dimming) for maximum flexibility.
- Can be used in 1 channel DMX mode, with the CCT preset of your choice.
- Prepared for wireless DMX: just connect an optional DONGLE WTR-DMX.
- Flicker-free TV recordings thanks to the adjustable LED refresh rate: 600 Hz to 4800 Hz!
- Manual dimming & zoom/focus control: easy alignment of the projector to the stage + use on exhibition stands.
- Selectable lamp behavior: halogen (slow) or led (fast).
- Four gradation curves: linear, square, inverse square, S curve.
- In case of DMX cut, you can choose between manual, blackout and freeze modes.
- RDM functionality for easy remote configuration and control: DMX addressing, channel mode, temperature, ...
- Lock function to prevent unwanted changes to the settings.
- Factory default and user settings can be saved/loaded.

- 3 and 5 pin DMX I/O + PowerCON® compatible I/O for easy chaining.


## INFORMATIONS COMPLÉMENTAIRES

<b>Brand</b>	Briteq
<b>Controllable colours</b>	Dynamic white, White presets (CCT)
<b>Protection class</b>	IP20
<b>Protocole</b>	DMX, RDM, Wireless DMX

# GALERIE D'IMAGES



CCT 2800K SEAMLESS CCT-CONTROL CCT 6000K

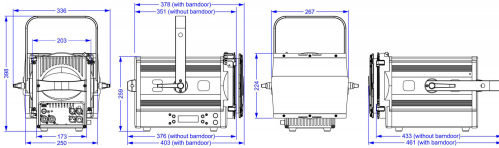

**BT-THEATRE 400TW**  
 Tunable White

Technical specifications:

- CCT 2906K
- CRI 97,4
- TLCI 97,8
- x 0,4424
- y 0,4037

BT-THEATRE LIGHT APPLIANCE

LUX (full on) 132000 33000 14670 8250 5280 2062

BT-THEATRE 400TW

BEAM: 11°

DISTANCE (m)	1	2	3	4	5	8
BEAM Ø (cm)	19	38	58	77	96	154

CCT-setting: 3000K

LUX (full on) 10800 2700 1200 675 432 169

BT-THEATRE 400TW

BEAM: 56°

DISTANCE (m)	1	2	3	4	5	8
BEAM Ø (cm)	106	213	319	425	532	851

