ARCHITECTURAL SPOTLIGHTS, BATTERY POWERED PROJECTORS

BTI-AKKUCHROMA

Part no. B05192 EAN 5420025651929

180 W IP65 battery-powered RGBL LED spotlight. Powerful, self-contained outdoor spotlight with 18 RGBL LEDs, 12,500 mAh battery (up to 10 h of runtime) and W-DMX-compatible wireless DMX module. Ideal as an uplighter or on a bridge, it offers silent operation. Standard 12° beam, frost filter included, optional filters available. Optional 120 x 60 cm flightcase.



PRODUCT PAGE ONLINE

briteq-lighting.com/bti-akkuchroma

Manuals, compatible accessories and updates — scan the code or click the address.

User manual (PDF)

Technical specifications

· Designed for maximum versatility:

· Stand-alone uplighter : sturdy stand, built-in battery and wireless DMX system

· LED deck floodlight : can be installed with structural clamps or omega brackets (optional)

· Emergency lighting : fixture switches on automatically in the event of a power cut (firmware version V1.20n and higher)

· Standard 12° beam (5700 lux at 5 m), modifiable with optional filters (1 frost filter included)

· Integrated wireless transceiver, 100% compatible with W-DMX G4S protocol

· Smooth RGBL color mixing

· 12,500 mAh Li-ion battery for up to 10 hours fade-free operation

· Built-in charger automatically recharges the battery during mains operation

· Multiple operating modes for maximum flexibility:

· Stand-alone : custom colors, RGB + CCT presets or automatic transitions

· Master/slave : control slave fixtures via wired or wireless DMX

· DMX wired or wireless : 3 HSV channels, 4 RGBL channels, 4 LEDCON02 channels or 8 STAGE channels

· W-DMX mode : the projector can be used as a transmitter or receiver without an external device

· IR remote control (optional) : simple control, even in master/slave mode

· Graphic OLED display with remaining battery life indication and smooth navigation thanks to touch-sensitive keys

· Totally silent, fanless passive cooling

· Seetronic powerCON TRUE1-compatible mains connection for fast daisy-chaining

· 3-pin and 5-pin DMX XLR connectors for extended compatibility

· Prepared for security via standard laptop anti-theft cable

· Optional 120 x 60 cm flight case, with charging capacity for 4 spotlights simultaneously

Overview

Powerful IP65 battery-powered outdoor LED floodlight with 18 x 15 W RGBL LEDs

Compatible accessories

BTI-AKKUCHROMA - 10x60 BEAM

B05222

BTI-AKKUCHROMA - 60x10 BEAM

B05221

BTI-AKKUCHROMA - 80° BEAM

B05223



BTI-AKKUCHROMA - BARNDOOR

B05224



BTI-IPTEST

B09904



CASE FOR AKKU BEAMER+CHROMA

B03319



IR-4 REMOTE

B05225



PCT1-HYBRID-XLR3-10M

B01572



PCT1-HYBRID-XLR3-1M5

B01569



PCT1-HYBRID-XLR3-3M

B01570



PCT1-HYBRID-XLR3-5M

B01571



PCT1-HYBRID-XLR5-10M

B01576

Photo



Photo



Photo



Photo


ALWAYS USE A SAFETY CABLE WHILE RIGGING
POWER STANDBY / ON
POWER OUT
POWER IN
AIR PRESSURE VALVE DO NOT REMOVE
BRITEQ
LIGHT RESEARCH
BTI-AKKUCHROMA
WWW.BRITEQ-LIGHTING.COM
DMX OUT
XLR 5pin
DMX IN
DMX OUT
XLR 3pin
DMX IN

Photo


ALWAYS USE A SAFETY CABLE WHILE RIGGING
POWER STANDBY / ON
POWER OUT
DMX OUT
DMX IN
DMX OUT
DMX IN
BRITEQ
LIGHT RESEARCH
BTI-AKKUCHROMA
WWW.BRITEQ-LIGHTING.COM

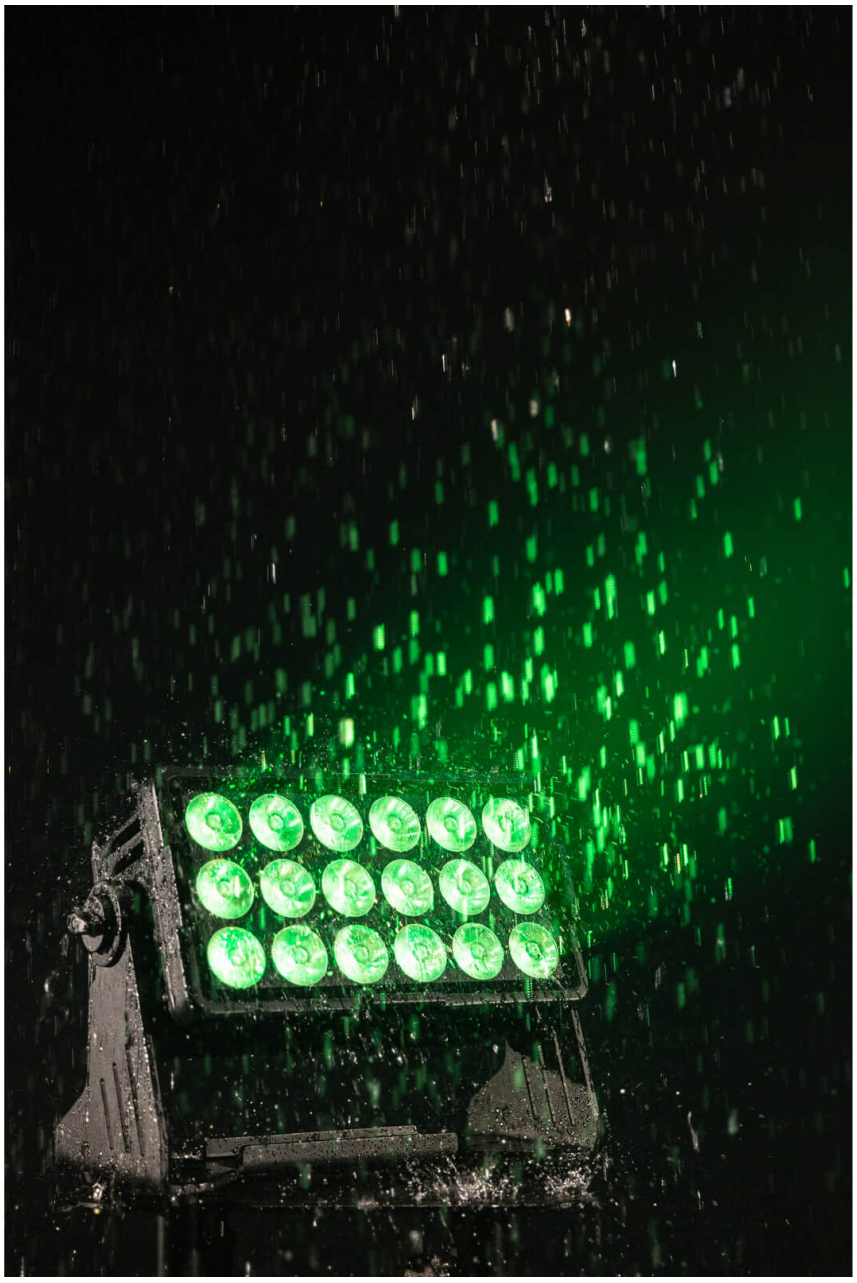
Photo



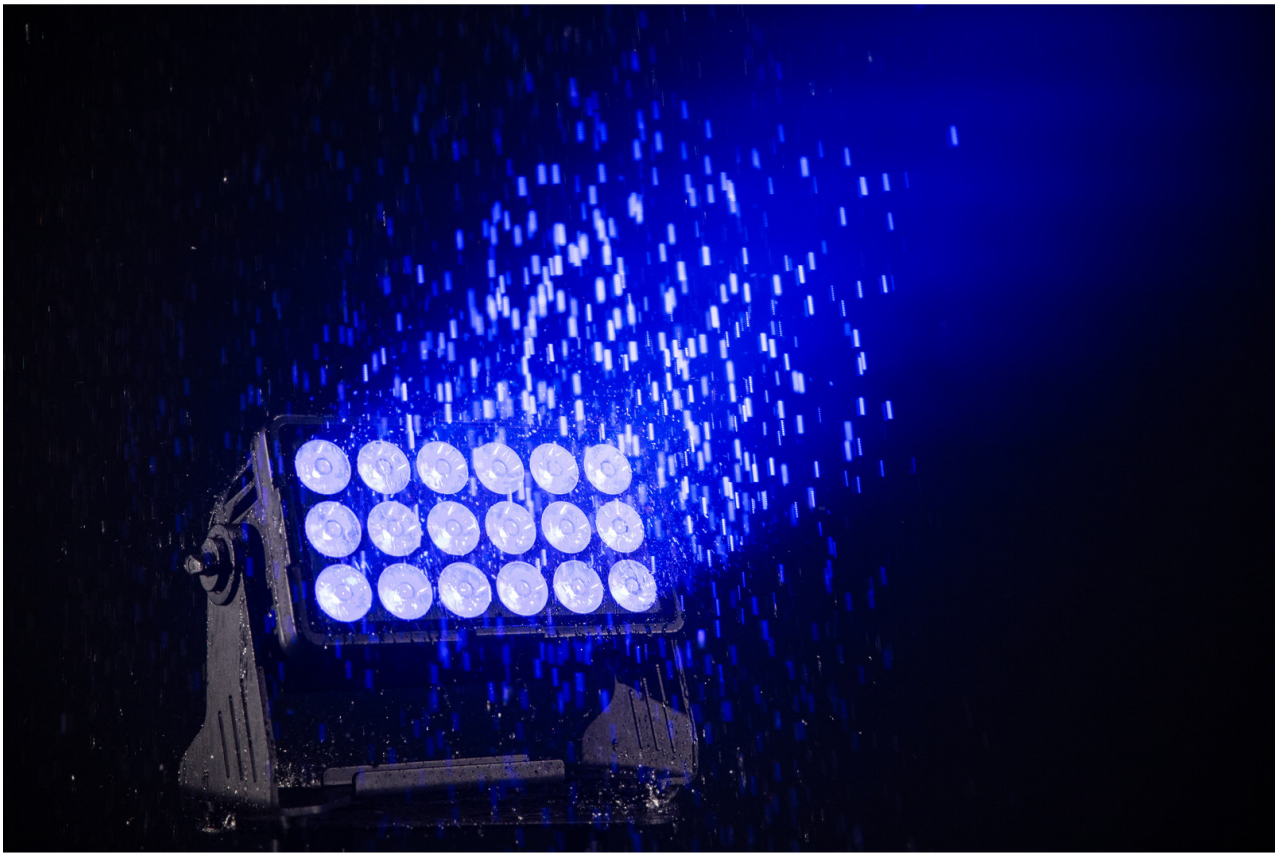
Photo



Photo



Photo



Photo

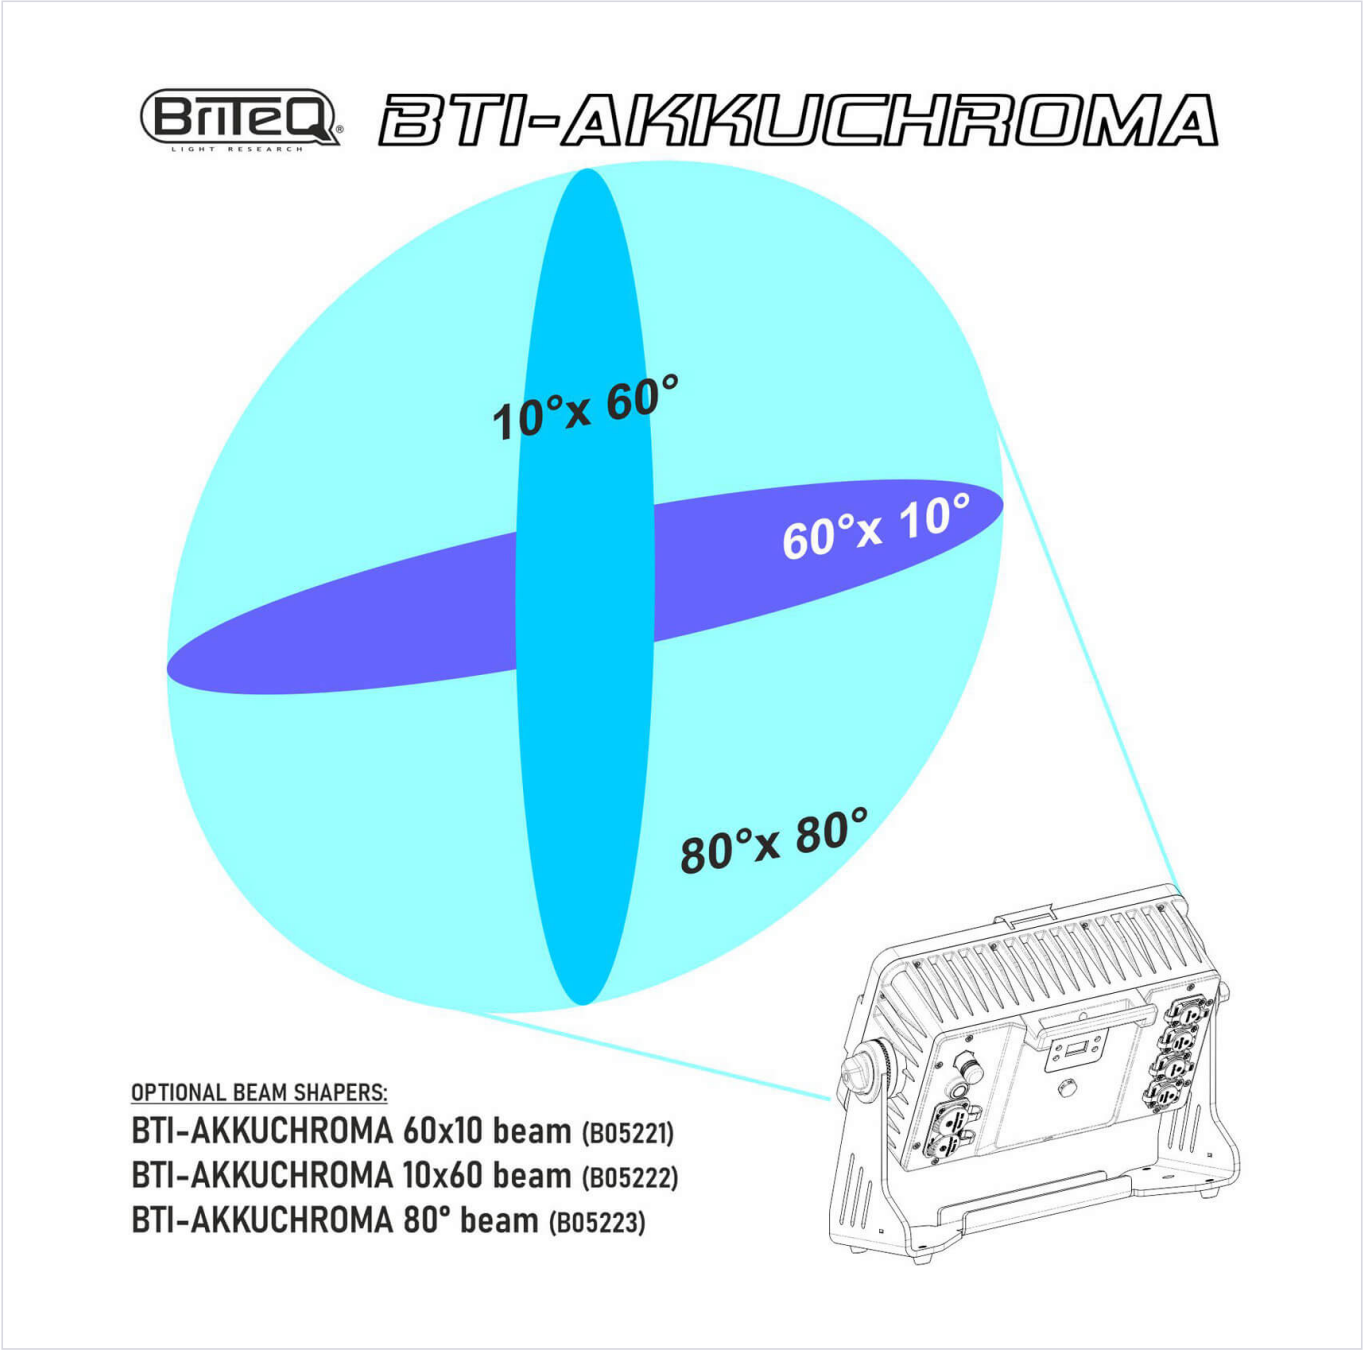


Photo

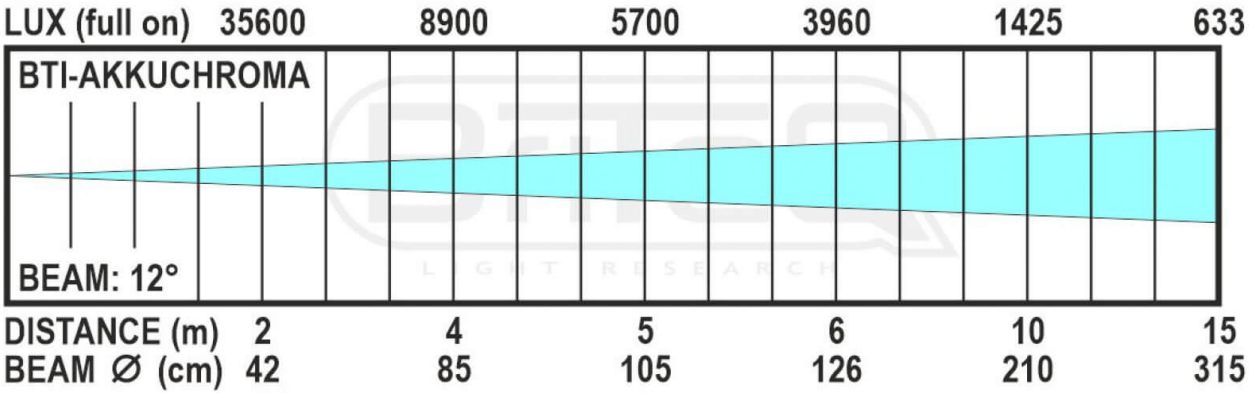


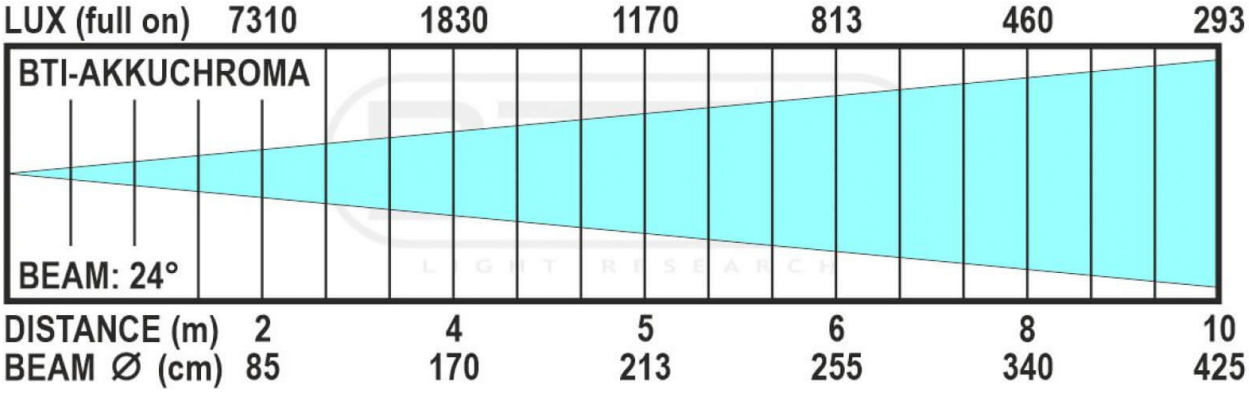
OPTIONAL

Photo


BTI-AKKUCHROMA
10°x 60°
60°x 10°
80°x 80°
OPTIONAL BEAM SHAPERS:
BTI-AKKUCHROMA 60x10 beam (B05221)
BTI-AKKUCHROMA 10x60 beam (B05222)
BTI-AKKUCHROMA 80° beam (B05223)

Photo


LUX (full on) 35600 8900 5700 3960 1425 633
BTI-AKKUCHROMA
BEAM: 12°
DISTANCE (m) 2 4 5 6 10 15
BEAM Ø (cm) 42 85 105 126 210 315


LUX (full on) 7310 1830 1170 813 460 293
BTI-AKKUCHROMA
BEAM: 24°
DISTANCE (m) 2 4 5 6 8 10
BEAM Ø (cm) 85 170 213 255 340 425

Photo

