



BTX-CIRRUS II

Lyre wash equipped with 19 LED Osram 30W RGB and white

Référence: B05526

2899,00 € inc. VAT



- Lyre wash equipped with 19 LED Osram 30 W RGB and white.
- Linear zoom from 4° to 60
- Exceptional light (fully lit):
 - 25 500 lux at 5 m (4°)
 - 980 lux at 5 m (60°)
- Max. light output : 20600 lm
- Full pixel mapping with 16-bit intensity control.
- Almost silent operation, perfect for large theaters, stages, rental companies...
- The latest generation of super quiet MOONS® motors for incredible smoothness and zoom performance!
- Internal battery: settings can be changed without connecting the unit to the power supply.
- 6 DMX modes: from 20 to 96 channels.
- MOONS® three-phase stepper motors provide very fast PAN/TILT motion with 8 or 16 bit precision.
- 2.8" color touch screen with automatic display rotation for easy and intuitive menu navigation.
- The simple firmware update keeps your equipment up to date (optional update tool, part number: B04389).
- Neutrik 3 and 5 pin XLR® inputs/outputs for maximum flexibility in a professional environment.
- Neutrik PowerCon® TRUE1 inputs/outputs: daisy-chained up to 16A for easy installation.
- Equipped with Omega brackets for quick installation.

Caractéristiques

Brand	Briteq
Protection class	IP20
Controllable colours	RGBW
Function	Motorized zoom
Protocole	DMX
Lux	25 500 lux (4°) at 5 m
Power	570 W
Type de lampe	LED

Références compatibles



**MOVING HEAD
CASE 4**

**769,00 € inc.
VAT**

Réf: B03288



**OMEGA BRACKET
SMALL**

**7,90 € inc.
VAT**


Réf: B02677

Galerie photos






LUX (red 640nm)	11112	4000	2041	1000	695	445
LUX (green 520nm)	24167	8700	4440	2175	1510	967
LUX (blue 445nm)	4235	1525	778	381	265	170
LUX (white 7200K)	32687	11770	6004	2942	2043	1307
LUX (full on)	70832	25500	13010	6375	4427	2833

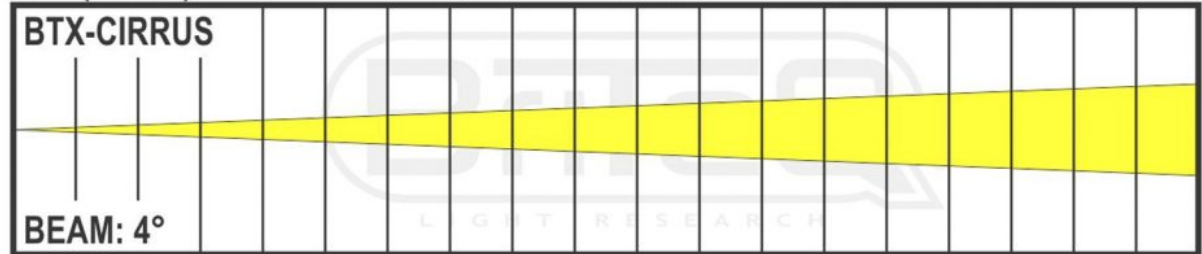

DISTANCE (m)	3	5	7	10	12	15
BEAM Ø (cm)	21	35	49	70	84	105

LUX (red 640nm)	341	155	79	39	27	17
LUX (green 520nm)	958	345	176	86	60	38
LUX (blue 445nm)	167	60	31	15	10,5	6,7
LUX (white 7200K)	1278	460	235	115	80	51
LUX (full on)	2722	980	500	245	170	109

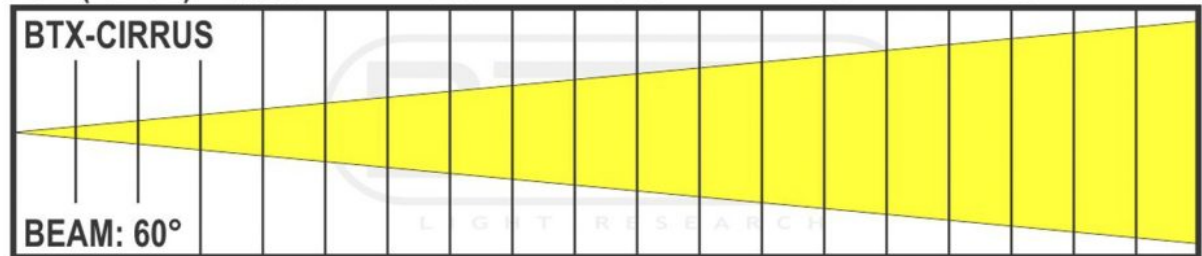

DISTANCE (m)	3	5	7	10	12	15
BEAM Ø (cm)	346	577	808	1150	1390	1730

