



IPANEL24x10QC

Référence: H10794

1299,00 € inc. VAT



24 LED 10W QC IP65 floodlight with pixel function

Optics

- LEDs: 24 four-color RGBW 10W LEDs **Luminosities**
- 3133 Lux at 3m
- 1083 Lux at 5m Double structured lenses for perfect beam distribution
- Opening angle 31° **Features**
- Integrated control box with drop-down display for :
- Choice of DMX address
- Choice of number of channels: 2, 4, 6, 8, 16, 18 or 20
- Choice of presets and integrated shows
- Choice of dimmer curves
- Master/Slave mode
- Manual mode
- User program for creating your own programs

Connections

- DMX IN and OUT via 3-pin XLR molded-in connectors
- POWER IN/OUT via 3-pin molded-in connectors **Features**
- Power supply: 100-240V/50-60Hz
- Consumption: 240 W
- Ventilation: convection
- Finishes: black-painted cast aluminum
- Waterproof diaphragm depressurization valve
- Dimensions: 582 x 270 x 178 mm
- Weight: 15 kg

Package contents

The package should contain the following items:

- The projector
- The user's guide
- A power cord with molded plugs IP65 / 2 poles + ground (1.80 m)
- A cord with molded plugs / XLR male (1.00 m)
- A cord with molded plugs / XLR female (1.00 m) **Compatible DMX and power cords**
- BRITEQ : POWERLINK CABLE 1,5m - 04911
- BRITEQ: SIGNAL LINK CABLE 1,5M - 04908
- BRITEQ: POWERLINK CABLE 5M - 04324
- BRITEQ: SIGNAL LINK CABLE 5M - 04903
- BRITEQ: POWERLINK CABLE 10m - 04913
- BRITEQ: SIGNAL LINK CABLE 10M - 04904

Instruction manuals


- Version française : [IPANEL24x10QC_manuel-web-fr.pdf](#)
- English Version : [IPANEL24x10QC_manuel-web-en.pdf](#)
- Deutsche Version : [IPANEL24x10QC_manuel-web-de.pdf](#)
- Versión en Español : [IPANEL24x10QC_manuel-web-es.pdf](#)
- Nederlandse Versie : [IPANEL24x10QC_manuel-web-nl.pdf](#)

Caractéristiques

Brand	Contest
--------------	---------

Controllable colours	RGBW
Protection class	IP65
Protocole	DMX

Galerie photos

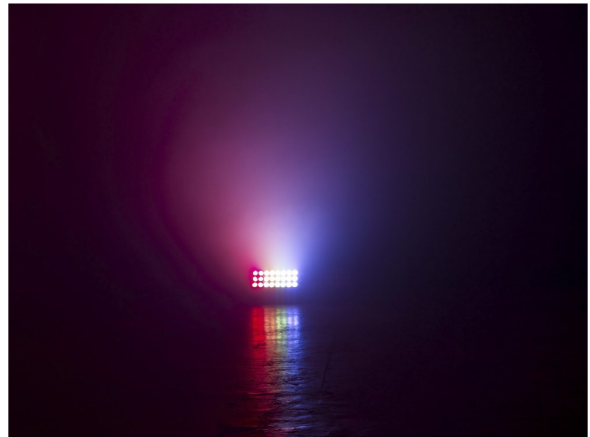



www.hitmusic.eu/en/