
QUATRO 390 HEAVY DUTY, RIGGING

SPTE390 blk

Part no. H11908 EAN 3662009029818

SPTE390 hanger: secure attachment for suspended structures

- Hanger for 390 mm structure
- Suspension piece for QUATRO39 structures
- Maximum load: 500 kg
- Double pipe clamp Ø50mm + sling eye
- European manufacturing
- ISO DIN 4113 and TÜV certified

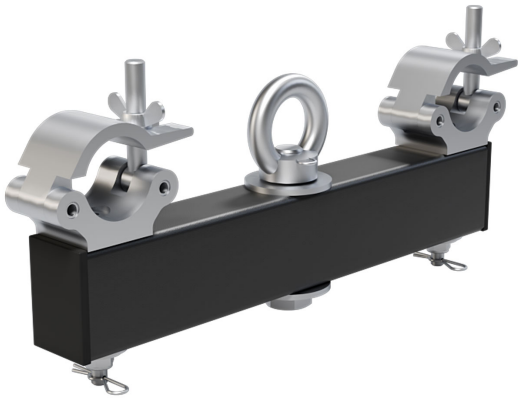

PRODUCT PAGE ONLINE

contestage.eu/en/product/spte390-blk

Manuals, compatible accessories and updates — scan the code or click the address.

Technical specifications

SWL	**500 kg**
Tube size	**50 mm**

Overview

SPTE390 hanger: secure attachment for suspended structures

The SPTE390 hanger is an aluminum lifting element designed for the secure suspension of QUATRO39 structures (390x390 mm). Equipped with a sling eye and two Ø50mm tube clamps, it allows QUATRO39 beams to be attached to overhead anchorage points: lifting grids, lifting motors, supporting beams or existing structures. Manufactured from high-strength aluminum, the SPTE390 supports a maximum load of 500 kg, ensuring optimum distribution of forces on the beam. Its black finish ensures perfect visual discretion for stage and event installations. Dimensions: 402 x 50 x 198 mm (L x W x H), weight: 4.43 kg.

Certified European manufacturing.

Each SPTE390 suspension component is manufactured in Europe from high-strength aluminum in accordance with ISO DIN 4113 and TÜV standards. This certification guarantees maximum reliability and safety for your permanent or temporary suspended installations. The quality of the materials and the rigorous quality control applied to each component ensure long-lasting performance and optimal resistance to the mechanical stresses of lifting structures. The SPTE390 meets the requirements of professional service providers, installers, and engineering firms seeking reliable solutions for critical suspension systems.

Double-clamp

mounting system.

The SPTE390 uses a double-clamp system for Ø50mm tubes, ensuring a secure and balanced grip on QUATRO39 beams. This system guarantees even load distribution across the beam while facilitating precise positioning of the suspension point.The mounting eyelet allows for the direct attachment of certified slings for safe lifting. Ideal for event service providers, the SPTE390 installs quickly and ensures impeccable stability for suspended structures.

Compatible with the QUATRO39 series and Contestage accessories.

The SPTE390 suspension bracket is specifically designed for the QUATRO39 series with its Ø50mm main tubes. Compatible with all Contestage slings and lifting accessories, it integrates easily into your existing installations. Maximum load: 500 kg. To ensure the safety of your installations, always observe the specified maximum loads and use appropriate certified slings.

Compatible accessories



QUATRO39-025 blk

H11894



QUATRO39-050 blk

H11895



QUATRO39-081 blk

H11896



QUATRO39-100 blk

H11897



QUATRO39-200 blk

H11898



QUATRO39-300 blk

H11899



QUATRO39-A01 blk

H11900



QUATRO39-A02 blk

H11901



QUATRO39-A03 blk

H11902



QUATRO39-A05 blk

H11903