



VBAR-100DW

Référence: H11380

799,00 € inc. VAT



IP66 architectural floodlight 24 LEDs 2700-5600 K 100 W 15 x 30°.

LED

- 24 x LEDs 4 W Dynamic White 2700-5600 K
- Asymmetrical lenses with 15 x 30° aperture

Brightness

- 4724 lm - 729 lux at 5 m

CRI

- 95

Consumption

- 102 W

Dimensions

- 997 x 117 x 53 mm

Weight

- 5.7 kg

Connections

- DMX/Power connections via hybrid IN and OUT cables with IP 67 plugs


Features

- External VRDM-Control box for RDM parameterization
- Compatible with RDM consoles on certain parameters
- DMX control protocol on 2 to 4 channels depending on the selected mode
- Power supply: 110-240 V/50-60 Hz
- Selectable refresh rate from 900 Hz to 3600 Hz
- Cooling: convection
- Finishes: cast aluminium, epoxy-painted grey-white RAL 9002
- IP 66 protection rating: resists dust and water splashes from all directions
- Shock resistance IK 07: protected against impact

Caractéristiques

Brand	Contest Architectural Lighting
Controllable colours	Cold white, Natural white, Warm white
Power	100 W
Protocole	DMX, RDM
Type de lampe	LED

Galerie photos

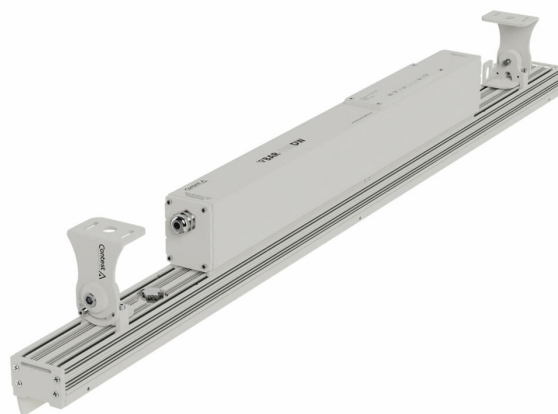

www.hitmusic.eu/en/