

VERSATILE SPOTLIGHTS


VCOB-60RGBL

Contest 
ARCHITECTURAL LIGHTING

Part no. H11376 EAN 3662009024783

Warning:

COB 60 W RGBL LED spotlight, 60° lens, 2893 lm. IP66 & IK07, DMX 2-8 channels, RDM via external housing. Passive cooling, RAL 9002 aluminum housing. Standalone or DMX modes. IP67 connections. Supplied with accessories, VC-Start cable, IP plugs and shutter.

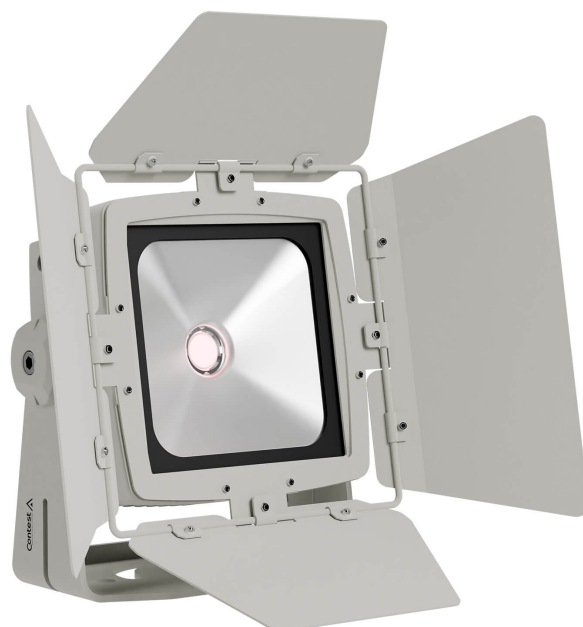

PRODUCT PAGE ONLINE

architectural-lighting.eu/specs-vcob-rgb1

Manuals, compatible accessories and updates — scan the code or click the address.

Technical specifications

Power	60 W
LEDs	COB 60 W 4 in 1 (Red, Green, Blue, Lime)
Lens angle of view	60°
Brightness	2893 lm - 80 lux at 5 m
Power consumption	60 W
Dimensions	180 x 117 x 221 mm
Weight	3.7 kg
Connections	DMX/Power via hybrid IN and OUT cables with IP67 plugs
Parameterization	VRDM-Control external box for RDM parameterization
RDM console compatibility	Yes, for basic parameters (DMX address, DMX mode, version, etc.).
	How to use :
Standalone	Master/Slave and Single
DMX	2 to 8 channels
Macro	Create your own macros for use in Master/Slave or Single mode
Power supply	110-240 V / 50-60 Hz
Refresh rate	Selectable from 900 Hz to 3600 Hz
Cooling	Convection
Finish	Cast aluminium, epoxy-painted grey-white RAL 9002
Degree of protection	IP66 (protected against dust and splashing water)
Impact resistance	IK07 (protected against a 2-joule impact from a 500-gram object dropped from a height of 40 cm)
Pressure control	Sealed diaphragm depressurization valve

Accessories

VC-Start power cord, IP plugs, shutter

Overview

Warning:

these fixtures are not treated against corrosion in saline environments. Use at the seaside or in heavily salt-laden atmospheres may cause premature deterioration of their components.

Compatible accessories



VRDM-CONTROL

H11383



VRDM-SPLIT

H11546

Photo



Photo

