



VPAR-150DW

IP66 architectural spotlight 18 DW 2700 - 6000 K 150 W 25° LEDs

Référence: H11551

929,00 € inc. VAT



- Power: 150 W
- LEDs: 18 x 15 W LEDs, Dynamic White 2700-6000 K
- Lens opening: 25°.
- Brightness: 6285 lm - 1270 lux at 5 m
- Power consumption: 153 W
- Dimensions: 157 x 269 x 291 mm
- Weight: 7 kg
- Connections: DMX/Power via hybrid IN and OUT cables with IP67 plugs
- Parameterization: VRDM-Control external box for RDM parameterization
- RDM console compatibility: Yes, for basic parameters (DMX address, DMX mode, version, etc.).
- How to use :
 - Standalone: Master/Slave and Single
 - DMX: 2 to 4 channels
- Macro: Create your own macros for use in Master/Slave or Single mode
- Power supply: 110-240 V / 50-60 Hz
- Refresh rate: Selectable from 900 Hz to 3600 Hz
- Cooling : Convection
- Finish: Cast aluminium, epoxy-painted grey-white RAL 9002
- Degree of protection: IP66 (protected against dust and splashing water)
- Shock resistance: IK07
- Pressure control: Sealed diaphragm depressurization valve
- Accessories: VC-Start power cord, IP plugs, flow switch

Caractéristiques

Brand	Contest Architectural Lighting
Controllable colours	Cold white, Natural white, Warm white
Power	150 W
Protocole	DMX, RDM
Type de lampe	LED

Références compatibles



VRDM-CONTROL

379,00 € inc.

VAT

Réf: H11383



VRDM-SPLIT


249,00 € inc.

VAT

Réf: H11546

Galerie photos



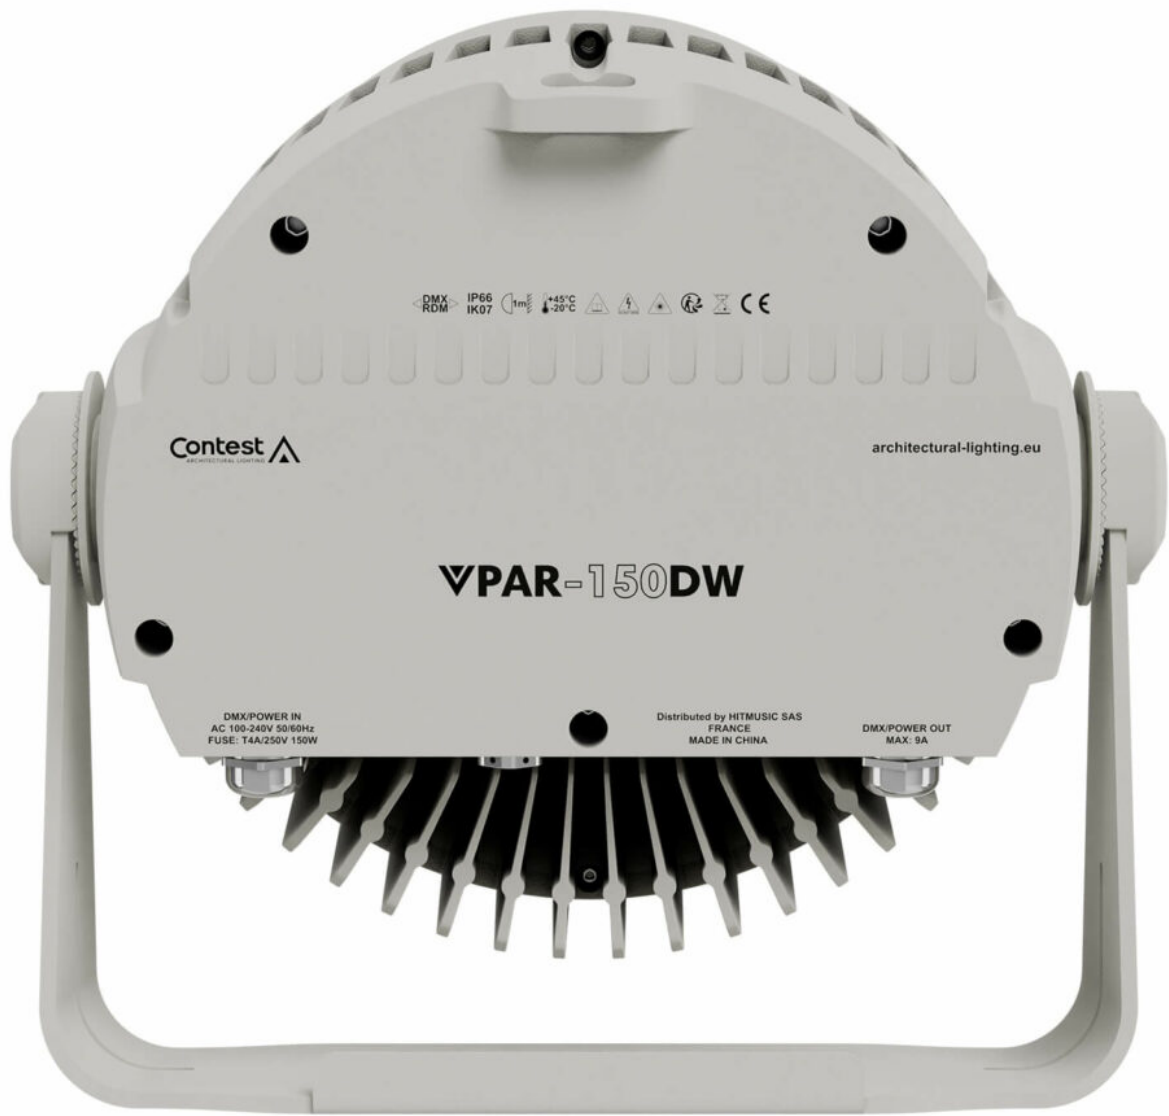

DMX RDM IP66 IK07 1m² +45°C -20°C

Contest
ARCHITECTURAL LIGHTING

architectural-lighting.eu

VPAR-150DW

DMX POWER IN
AC 100-240V 50/60Hz
FUSE: T4A/250V 150W

Distributed by HITMUSIC SAS
FRANCE
MADE IN CHINA

DMX POWER OUT
MAX: 9A