

VERSATILE SPOTLIGHTS

VPAR-40RGBL

Contest 
ARCHITECTURAL LIGHTING

Part no. H11754 EAN 3662009028293

Warning:

40 W 4-in-1 RGBL LED spotlight (Red, Green, Blue, Lime), 10° lens (12°/26° filters) IP66 & IK06, 2-8 DMX channels, RDM via external housing. Passive cooling, RAL 9002 aluminum housing. Standalone or DMX modes. IP67 connections. Supplied with VC-Start cable, IP plugs and barn door.



PRODUCT PAGE ONLINE

architectural-lighting.eu/specs-vpar-rgb1

Manuals, compatible accessories and updates — scan the code or click the address.

Technical specifications

Power	40 W
LEDs	1 x 40 W 4-in-1 LED (Red, Green, Blue, Lime)
Lens aperture	10° (including diffusion filters: 12° and 26°)
	Brightness :
	749 lm unfiltered (10°)
	696 lm with filter (12°)
	659 lm with filter (26°)
Power consumption	50 W
Dimensions	145 x 117 x 144 mm
Weight	2 kg
Connections	DMX/Power via hybrid IN and OUT cables with IP67 plugs
Parameterization	VRDM-Control external box for RDM parameterization
RDM console compatibility	Yes, for basic parameters (DMX address, DMX mode, version, etc.).
	How to use :
Standalone	Master/Slave and Single
DMX	2 to 8 channels
Macro	Macros can be created for use in Master/Slave or Single mode.
Power supply	110-240 V / 50-60 Hz
Refresh rate	Selectable from 900 Hz to 3600 Hz
Cooling	Convection
Finish	Cast aluminium, epoxy-painted grey-white RAL 9002


Degree of protection	IP66 (protected against dust and splashing water)
Shock resistance	IK06
Pressure control	Sealed diaphragm depressurization valve
Accessories	VC-Start power cord, IP plugs, flow switch

Overview

Warning:

these fixtures are not treated against corrosion in saline environments. Use at the seaside or in heavily salt-laden atmospheres may cause premature deterioration of their components.

Dimensions

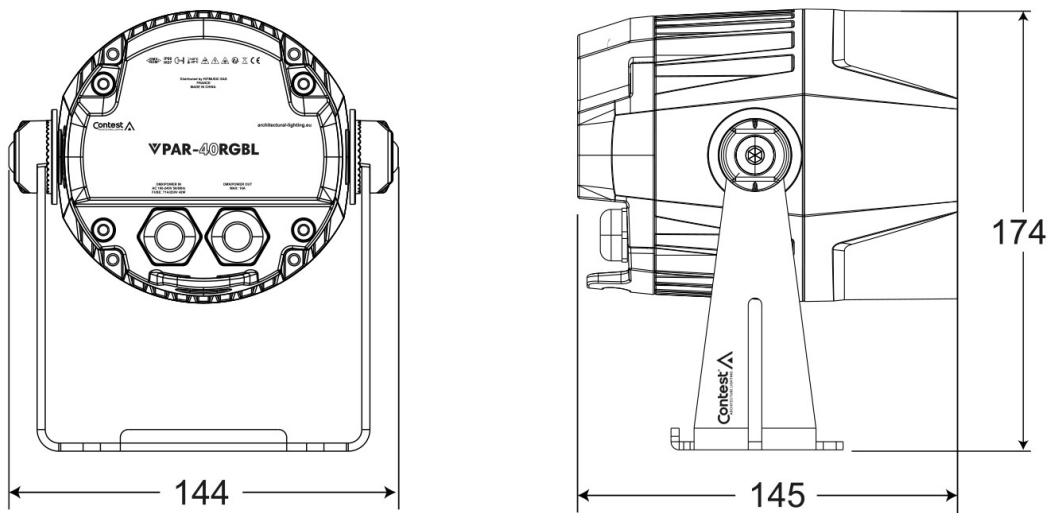

Compatible accessories



VRDM-CONTROL

H11383