

PUBLIC ADDRESS, WALL CONTROLLERS


 **pa** audiophony
public address

AmiD4

Part no. H11880 EAN 3662009029535

Microphone and line inputs, to the Dante network—and back to the local system.

- › Dante 2-in/2-out microphone/line wall-mounted interface for Ami series matrices — 2 XLR combo inputs (48V) and 2 XLR outputs
- › PoE

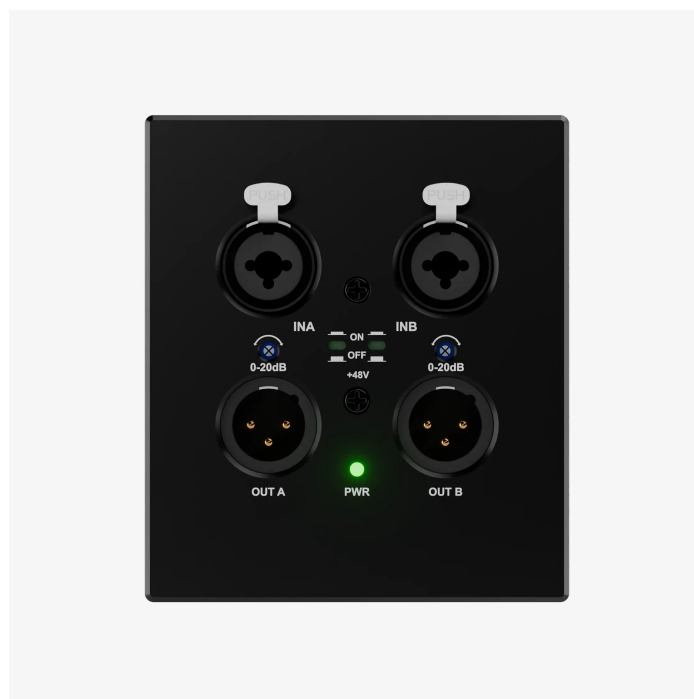

PRODUCT PAGE ONLINE

audiophony-pa.com/ami/amid4.html

Manuals, compatible accessories and updates — scan the code or click the address.

[User manual \(PDF\)](#)

Technical specifications

	2 balanced mic/line combo inputs
	48V phantom power per channel, independently switchable
	Adjustable input gain up to 20 dB
Sampling rate	48 kHz / 24 bits
	2 balanced XLR line outputs — local audio playback
	Dante 2-channel input / 2-channel output converter
	Routing via the Dante Controller software
	Compatible with the Dante versions of the entire Ami lineup
Frequency response	20 Hz - 20 kHz ±0.2 dB
Maximum level	+18 dBu balanced
THD	0.002% @ 4 dBu
Background noise	-97 dBu
Input impedance	20 kΩ
Output impedance	100 Ω
Channel isolation @ 1 kHz	100 dB
Power	IEEE 802.3af PoE — PoE switch required
Power consumption	< 5 W
Dimensions	95 × 110 × 50 mm
Weight	345 g

Overview

Microphone and line inputs, to the Dante network—and back to the local system.

The AmiD4 is the wall-mount unit in the Ami series designed to connect microphone or line sources directly to a Dante network, while simultaneously routing audio to a local sound system from the same location. Its two balanced combo inputs, with adjustable gain up to 20 dB and 48V phantom power switchable per channel, accept both condenser microphones and line-level sources. Its two balanced XLR outputs feed a local sound system in parallel.

Routing and Compatibility.

Dante signals are routed using the Dante Controller software. Powered via 802.3af PoE over a single network cable (PoE switch required). Compatible with the Dante versions of all mixers in the Ami series.

Technical Specifications:

Supplied with:

One small flat-head screwdriver

6 screws

Compatible accessories



Ami04D
H11873



Ami08D
H11875



Ami16D
H11877



PoE10-250
H11913

Photo



Photo

