



## BT-THEATRE 200TW

Powerful Fresnel theater/TV LED 200W with adjustable white from 2800K to 6000K

Référence: B06030

**589,00 € inc. VAT**



- Powerful 200W LED theater spotlight with **adjustable CCT**.
- Double LED (100W 2800 K + 100W 6000 K) for adjustable white with CCT from 2800 K to 6000 K!
- This versatile projector is perfect for TV work, theater, rentals, and exhibition booths!
- Outstanding photometric performance / price: CRI/Ra > 96, TLCI >98, CQS >96, Rf >94, Rg >100 (@3000 K)
- Manual beam angle adjustment: 12° ~ 56° (field of view: 20° ~ 67°)
- Manual CCT presets when used in stand-alone mode: 2800 K, 3000 K, 3200 K, 4000 K, 4300 K, 5600 K, 6000 K.
- Filter holder for the use of color filters and eight-leaf barn door included.
- No need for heavy and expensive drive blocks!
- Very quiet operation: very low-noise, temperature-controlled cooling fan.
- LCD screen for easy navigation through the configuration menu!
- Manual or DMX control: 5 different channel modes (8bit/16bit dimmer) for maximum flexibility.
- Can be used in DMX 1 channel mode, with CCT preset of your choice.
- Prepared for wireless DMX: just connect an optional DONGLE WTR-DMX! (Briteq® code: B04645)
- Flicker-free TV recordings thanks to the adjustable refresh rate of the LED: 600 Hz to 4800 Hz!
- Manual dimming and focus adjustment: easy alignment of the projector on stage + use on exhibition stands.
- Choice of lamp behavior: halogen lamp (slow) or LED (fast).
- Four intensity variation curves: linear, square, inverted square, S-curve.
- In case of DMX failure, blackout, freeze or manual mode will remain available.
- RDM functionality for easy installation and remote monitoring: DMX addressing, channel mode, temperature, ...
- Lock function to prevent unwanted configuration changes.
- Factory default settings and personal settings can be stored/loaded.
- 3- and 5-pin DMX inputs/outputs and lockable power connectors (Neutrik® PowerCon® compatible) for easy daisy-chaining

## Caractéristiques

<b>Brand</b>	Briteq
<b>Controllable colours</b>	Dynamic white, White presets (CCT)
<b>Protection class</b>	IP20
<b>Protocole</b>	DMX, RDM, Wireless DMX

## Références compatibles



**BT-THEATRE  
YOKE ADAPTER-2**

**36,90 € inc.  
VAT**

Réf: B06036



**FIRMWARE  
UPDATER 2+**

**109,00 € inc.  
VAT**

Réf: B05019



**BT-THEATRE  
SOFT1**

**39,00 € inc.  
VAT**

Réf: B06034



**PROJECTOR CASE  
4**

**749,00 € inc.  
VAT**

Réf: B03285



## Galerie photos







CCT 2800K      SEAMLESS CCT-CONTROL      CCT 6000K

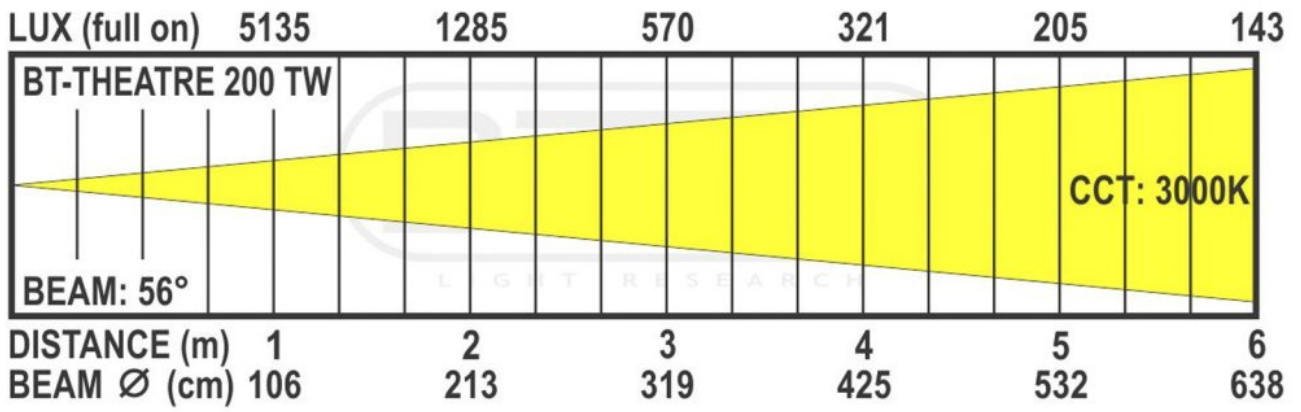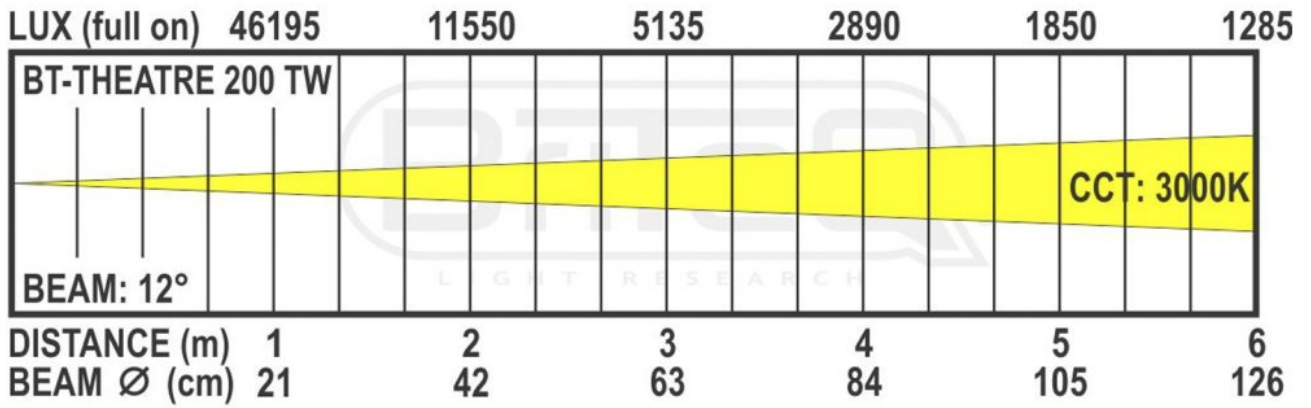

**BT-THEATRE 200TW**  
(CCT setting = 3000K)



- \* CRI/Ra >96
- \* TLCI >98
- \* CQS >96
- \* Rf >94
- \* Rg >100

